



OLED


DESIGN-SCHEIBENLEUCHE
DESIGN EDGE LUMINAIRE



GERMAN
DESIGN
AWARD
WINNER
2016



reddot award 2016
winner



- Aluminium bedampfter Kunststoff
- 20m Erkennungsweite
- komplettes Piktogrammset als Einsteckfolie
- IP20
- OLED Leuchtmittel
- Deckenaufbau-, Deckeneinbau- oder Wandeinbaumontage
- -5° bis +35°C

- Aluminium coated plastic
- 20m viewing distance
- Complete set of pictographs
- IP20
- OLED illuminant
- Surface ceiling, recessed ceiling or recessed wall mounted
- -5° to +35°C

Als Designleuchte eignet sie sich für alle Bereiche in denen Eleganz eine wichtige Rolle spielt. Sie nutzt als Lichtquelle eine vollflächige Organische LED kurz OLED. Damit erreicht sie eine 100% homogene Ausleuchtung des Piktogrammes.



Die Gehäuseoberfläche wird in einem Verfahren aluminiumbeschichtet, wie es bereits in der Automobilindustrie eingesetzt wird. Planungssicherheit erhalten Sie durch werkzeuglosen, variablen Einsatz der Piktogramme vor Ort. LED-Rettungszeichenleuchte nach DIN EN 60598-1, DIN EN 60598-2-22, DIN EN 7010 und DIN EN 1838.

Design luminaire for all purposes where elegance plays an important role. It uses as a light source a full-area organic LED or OLED. Thus a 100% homogeneous illumination of the pictogram is achieved.

The housing surface is aluminized in a process as it is already used in the automotive industry. The OLED gives you planning security with variable use of pictographs which are changeable without tools on site. LED escape route luminaire in accordance with DIN EN 60598-1, EN 60598-2-22, EN 7010 and DIN EN 1838.



OMCD009ML

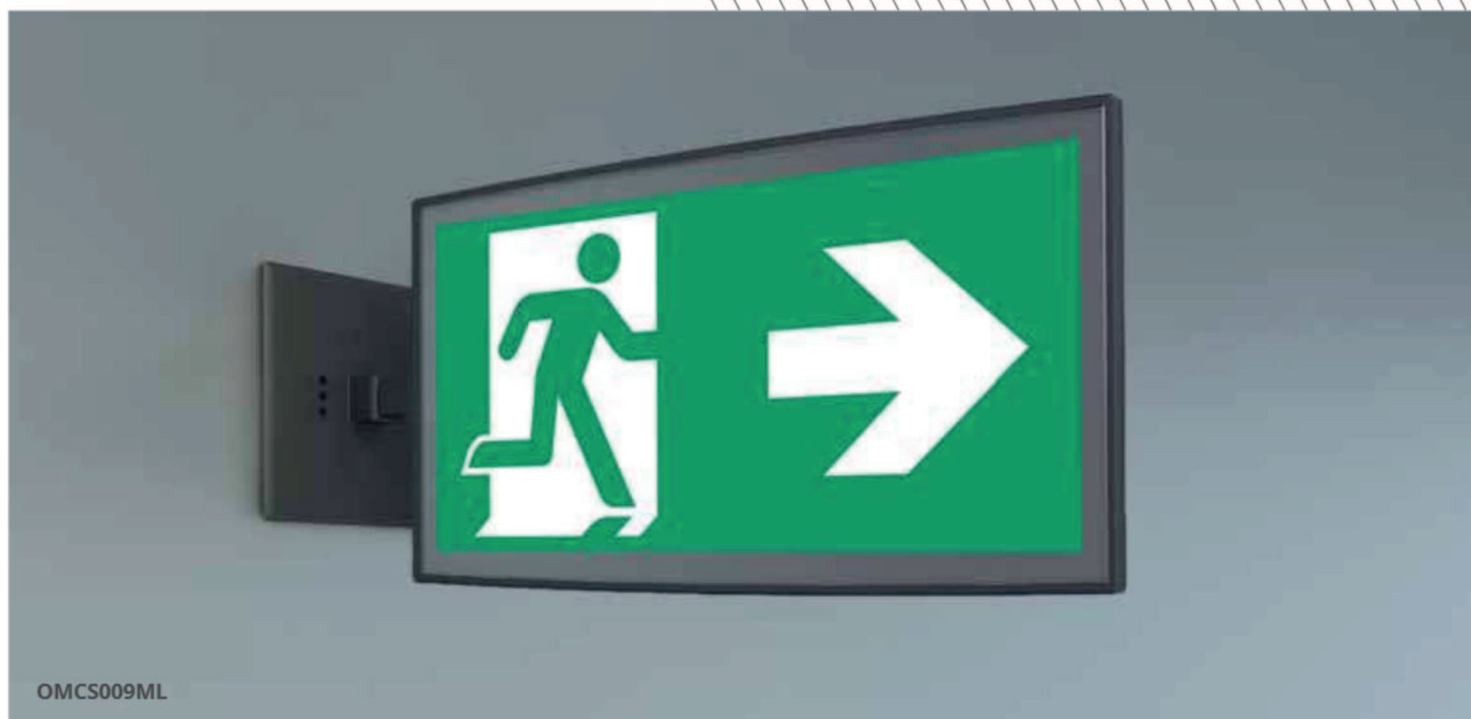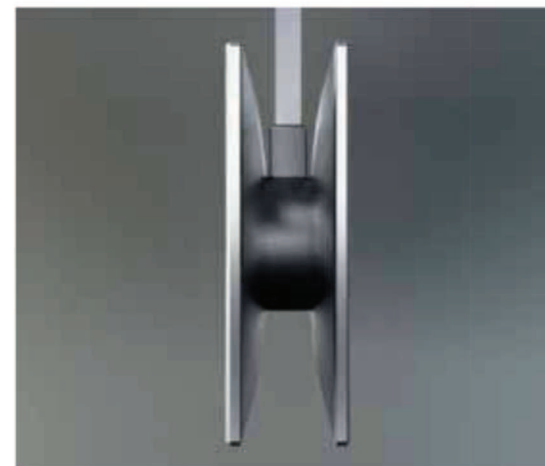

OMCS009ML

OLED





DESIGN-SCHEIBENLEUCHE DESIGN EDGE LUMINAIRE



reddot award 2016
winner




OMDS009ML-AZ

Ausführung Version	Bestellnummern nach Montageart Order numbers acc. to mounting			Autonomiezeit Operating Time	Leuchtmittel Illuminant
	Decke / Ceiling	Deckeneinbau Ceiling Recessed	Wandeinbau Recessed Wall		
Leuchten für Zentralanlagen AC/DC inkl. Überwachungsbaustein Luminaires for central power systems AC/DC incl. monitoring module					
OLED Einseitig Single sided label	OMDS009ML-AZ *	OMCS009ML	OMRS009ML	ZBA	1x 3.4 W  
OLED Doppelseitig Double sided label	OMDD009ML-AZ *	OMCD009ML		ZBA	2x 3.4 W  


* -AZ: mit Deckenaufbaugeschäule in anthrazit / with ceiling surface mounted housing in anthracite




Maße OLED Wandeinbau
Dimensions OLED recessed wall mounted

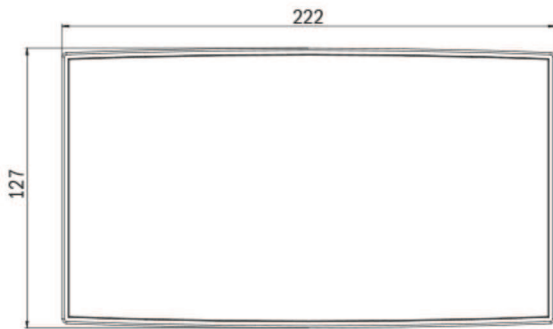

Standard-Einbaudose
Standard Installation jack

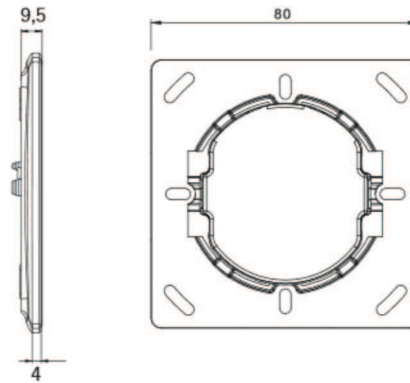

Maße OLED Deckenmontage
Dimensions OLED ceiling mounted

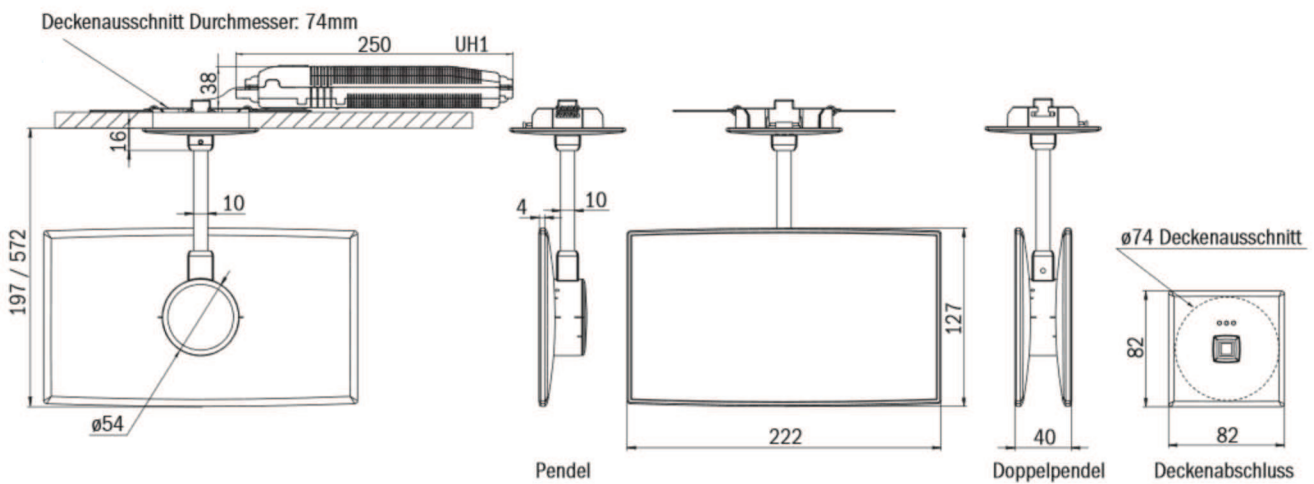

Für Betoneinbau empfehlen wir die Dosen HaloX-0 + HaloX-40 der Firma Kaiser.
 For concrete installation, we recommend the recessed boxes HaloX-0 + HaloX-40 from Kaiser.

Zubehör / Accessoires



OM1PA Pendel 500mm kürzbar /
OM1PA pendulum 500mm reduceable

Alle Maßangaben in mm
 All dimensions in mm